

### Crue® Semi-professional kitchen sink faucet with threefunction sprayhead K-22973

Features

- Professional-style faucet with an easy-to-clean coated hose and removable coil
- Three-function pull-down sprayhead with touch-control allows you to switch between stream, Sweep<sup>®</sup> spray and Boost technology
- Sweep® spray features specially angled nozzles that form a wide, powerful blade of water to sweep your dishes and sink clean
- Boost technology increases the flow rate by 30% with the press of a button. Use Boost with stream for faster filling or with Sweep<sup>®</sup> spray for more powerful cleaning
- DockNetik® magnetic docking system securely locks sprayhead into place when not in use
- ProMotion<sup>®</sup> technology's light, quiet braided hose and swiveling ball joint make the pull-down sprayhead easier and more comfortable to use
- MasterClean<sup>™</sup> sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- High-arch spout offers vertical clearance for tall cookware and pitchers
- Single lever handle makes adjusting water temperature easy.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar)

### Material

- Premium metal construction for durability and reliability
- KOHLER<sup>®</sup> finishes resist corrosion and tarnishing

### Installation

- Single-hole or three-hole installation (escutcheon plate included)
- Flexible supply lines simplify installation

### **Recommended Products/Accessories**

K-77685 Single-Cartridge Water Filtration System K-77686 Double-Cartridge Water Filtration System K-77687 single replacement filter cartridge K-77688 Replacement Filter Cartridges, Two-Pack

### **Optional Products/Accessories**

K-22071 Three-hole kitchen faucet escutcheon





### Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 IAPMO Certification

# KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

- CP Polished Chrome
- VS Vibrant® Stainless
- BL Matte Black
- 2MB Vibrant® Brushed Moderne Brass




1-800-4KOHLER (1-800-456-4537) Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to <u>www.kohler.com</u>.USA 1-13-2024 07:50 - US

# Crue®

KOHLER, Faucets

Semi-professional kitchen sink faucet with threefunction sprayhead K-22973

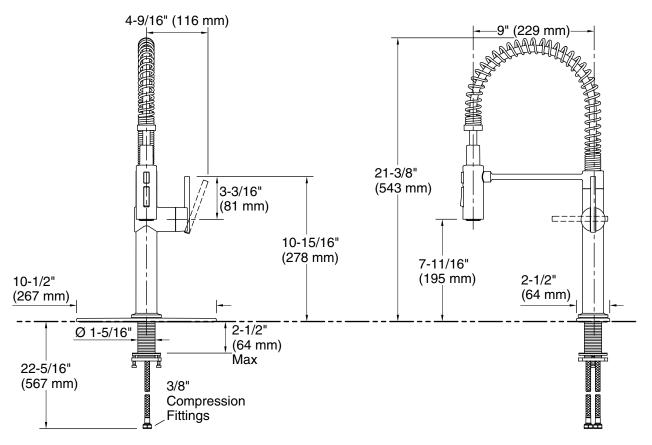

### **Technical Information**

All product dimensions are nominal.

Drain included:

Spout:

Spout reach: 9" (229 mm)

### Pressure/fixture Supply Requirements

No

Fixture pressure 125 psi (861.8 kPa) max (static): Fixture pressure min 20 psi (137.9 kPa) (static):

### Notes

Install this product according to the installation instructions.

ADA complaint for faucet handles only.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

