TOTO

MW6464736CEMFGN(A)

Aquia_® IV WASHLET_®+ S7A One-Piece Toilet - 1.28 GPF / 0.9 GPF

FEATURES

- Concealed supply connection for seamless installation
- DYNAMAX TORNADO FLUSH_® utilizes 360° cleaning power to reach every part of the bowl
- Ultra high-efficiency dual flush 1.28 GPF / 0.9 GPF (4.8 LPF / 3.4 LPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Completely skirted design for a sleek and understated look that's easier to clean
- Universal Height
- Chrome plated trip lever
- 12" Rough-in
- Elongated front bowl toilet and WASHLET+ S7A set
- EWATER+® auto-cleans wand and bowl after every use
- $\bullet \quad \mathsf{PREMIST}_{\scriptsize{\textcircled{\tiny{\$}}}}$ automatically mists the bowl before each use
- Multifunction pearl white block-style remote control
- Auto open/close lid
- Night light
- Auto flush available as upgrade

MODELS

MW6464736CEMFGNA (#01)

With CEFIONTECT ceramic glaze, WASHLET+ S7A with contemporary design and Auto Flush

- CST646CEMFGNAT40
 Elongated bowl with CEFIONTECT
- **SW4736AT40** WASHLET+ S7A
- THU855 Auto Flush Kit
- MW6464736CEMFGN (#01)

Same as MW6464736CEMFGNA without Auto Flush

OPTIONAL COMPONENTS

- TSU48.10 10" Unifit Rough-In
- TSU48.14 14" Unifit Rough-In
- THU848(01, #BN, #PN, #MBL)-A

Trip Lever - Cotton, Brushed Nickel, Polished Nickel, Matte Black

COLORS/FINISHES

#01 Cotton











U UNIVERSAL HEIGHT

PRODUCT SPECIFICATION

The one-piece, ultra high-efficiency, DYNAMAX TORNADO FLUSH toilet shall be dual flush 1.28 GPF / 0.9 GPF. Toilet shall be coated with CEFIONTECT, elongated front bowl, high profile tank, UNIVERSAL HEIGHT, complete skirted bowl and chrome push-button. Toilet shall be TOTO Model MW6464736CEMFGN #01.

See SW4736AT40 Specification Sheet for details on included WASHLET.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO (cUPC_®), EPA WaterSense_®, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant for residential use with autoflush feature model
- Complies with CA Prop 65 warning requirements







Aquia_® IV WASHLET_®+ S7A One-Piece Toilet - 1.28 GPF / 0.9 GPF

SPECIFICATIONS


| Water Use | 1.28 GPF / 0.9 GPF (4.8 LPF / 3.4 LPF) |
|------------------------|---|
| Flush System | DYNAMAX TORNADO FLUSH® |
| Min. Water Pressure | 8 psi (Flowing) |
| Water Surface | 7" × 5" |
| Trap Diameter | 2-1/4" |
| Rough-in | 12" (10" and 14" options available) |
| Trap Seal | 2-1/8" |
| Warranty | One Year Limited Warranty |
| Material | Vitreous China |
| Shipping Weight | CST646CEMFGNAT40: 112 lbs SW4736AT40: 15 lbs |
| Shipping Dimensions | CST646CEMFGNAT40 29-1/2" L x 17-5/8" W x 28-1/8" H SW4736AT40 23-3/8" L x 17-5/8" W x 6-1/4" H |

See SW4736AT40 Specification Sheet for details on included WASHLET.

INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

DIMENSIONS

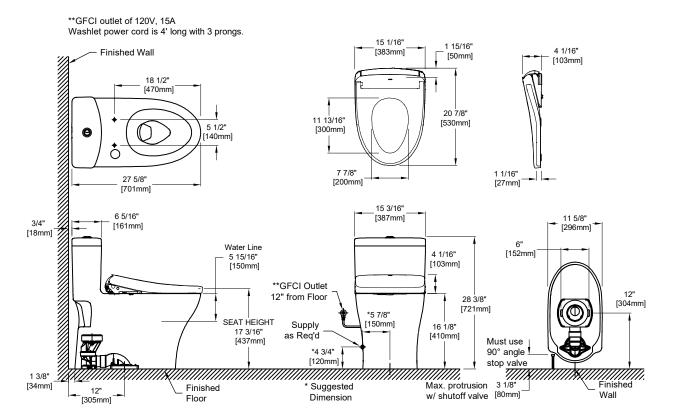



These dimensions and specifications are subject to change without notice