## **Purist®**

# **KOHLER** Faucets Widespread bathroom sink faucet with Lever handles,

1.2 gpm K-14406-4

### **Features**

- Two lever handles offer separate control of hot and cold water
- 5-1/2" (140 mm) spout reach
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)
- Includes metal pop-up drain with 1-1/4" (32 mm) tailpiece
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Coordinates with Purist faucets, accessories, and showering components to complete your bathroom

#### Material

- Premium metal construction for durability and reliability
- KOHLER® finishes resist corrosion and tarnishing

## Installation

- Handles are preassembled on valves to simplify installation
- For 8" 16" (203 406 mm) centers
- Widespread

## **Recommended Products/Accessories**

K-23726 Drain treatment

K-23723 Faucet cleaner

K-14375 24" Double Towel Bar

K-14377 Pivoting toilet paper holder

K-14435 18" Towel Bar

K-14436 24" Towel Bar

K-14441 Towel Ring

K-14443 Robe Hook

K-14444 Vertical toilet paper holder





## Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI/CAN 61

NSF/ANSI/CAN 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

IAPMO Certification

## **KOHLER® Faucet Lifetime Limited** Warranty

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	SN	Vibrant® Polished Nickel
	AF	Vibrant® French Gold
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze






## **Purist®**

## KOHLER, Faucets Widespread bathroom sink faucet with Lever handles, 1.2 gpm

K-14406-4

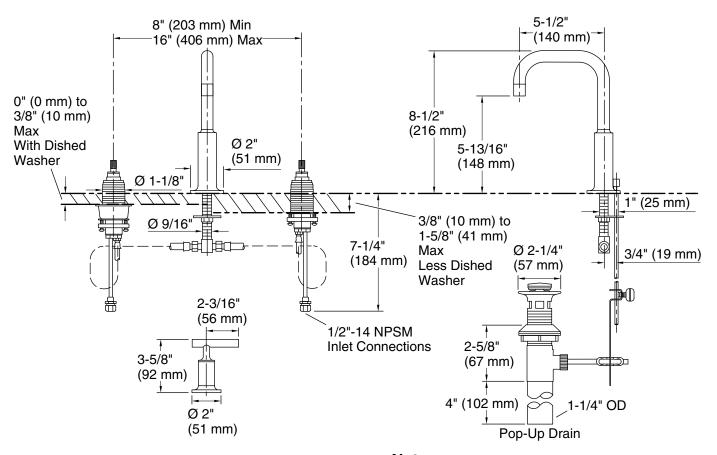

#### **Technical Information**

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes

Spout:

Spout reach: 5-1/2" (140 mm)

#### **Notes**

Install this product according to the installation guide.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

