


CRECENT CV-SS05 INSTRUCTION MANUAL

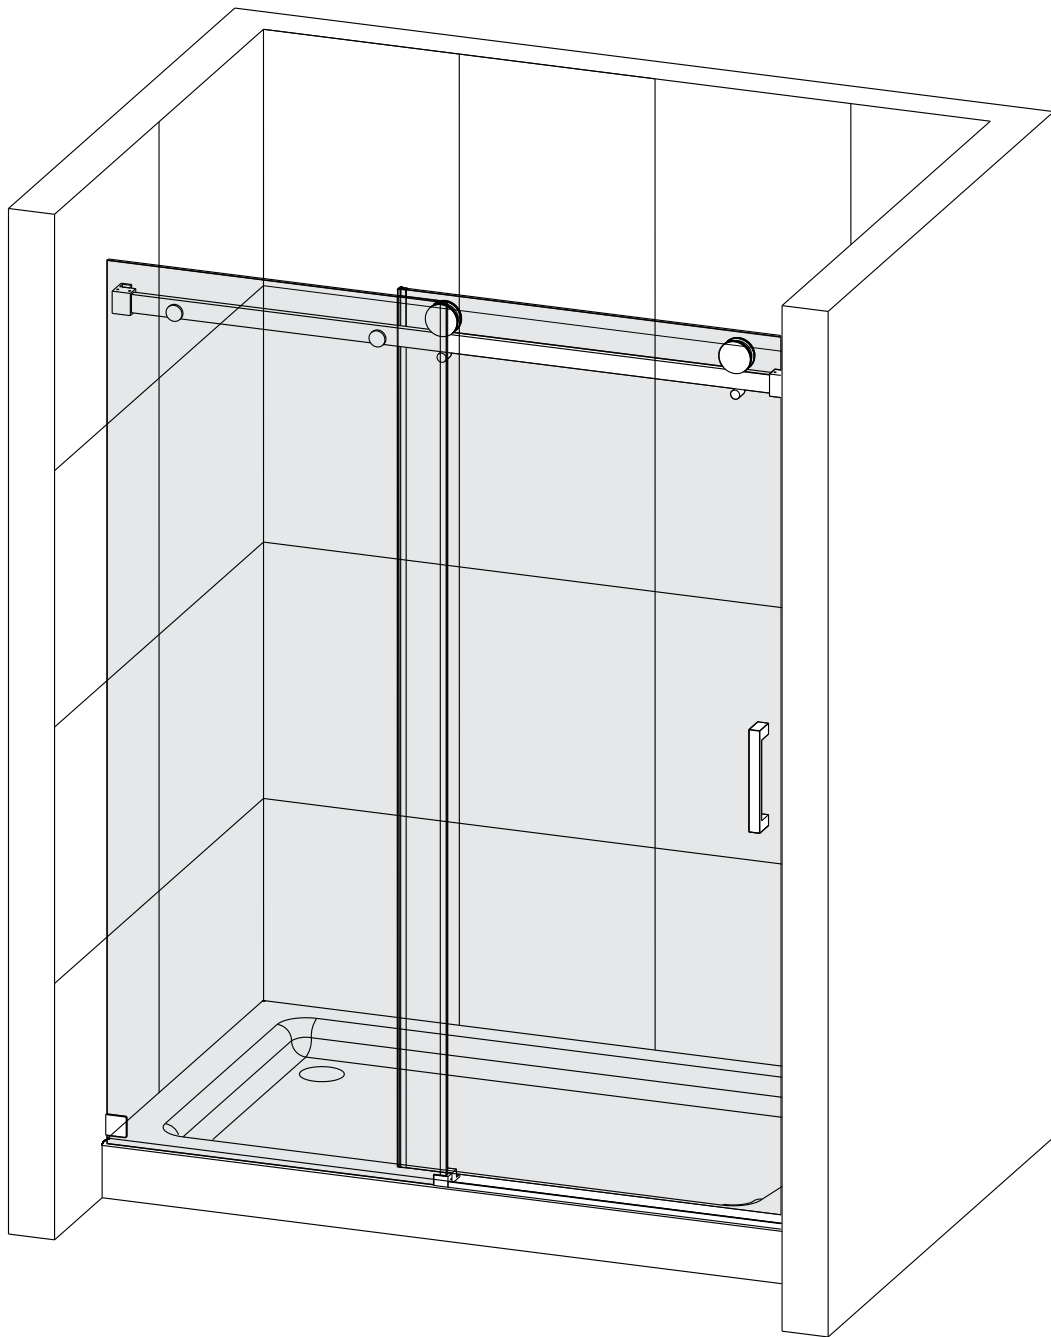

2 PEOPLE REQUIRED

Please keep this manual and product code number for future reference and for ordering replacement parts if necessary.

GENERAL INSTRUCTIONS

- Read this manual carefully and completely before proceeding.
- It is recommended that you wear safety glasses at all times during the installation.

INSTALLATION OVER CERAMIC TILES

- If your shower door is to be installed over ceramic tiles, the tiles should lay completely under the wall jamb.
- Silicone should be used to seal the gap where the ceramic tiles meet the fixed panel.











NOTICE

- Caulking: no sealant is required inside the shower, unless otherwise stated.
- Some models are equipped with clear sealing gaskets.

CARE FOR YOUR SHOWER DOOR



- Never use scouring powder pads or sharp instruments on metal pieces or glass panels.
An occasional wiping down with a mild soap diluted in water is all that is needed to keep the panels and metal parts looking new.
- We recommend wiping the glass panels with a squeegee after each use.

TOOLS REQUIRED


 SPIRIT LEVEL	 POWER DRILL	 PENCIL	 SILICONE	 MALLET
 TAPE MEASURE	 SCREW DRIVER	 6mm&3mm(1/4" & 1/8") DRILL BITS	 HACKSAW	 SAFETY GLASSES





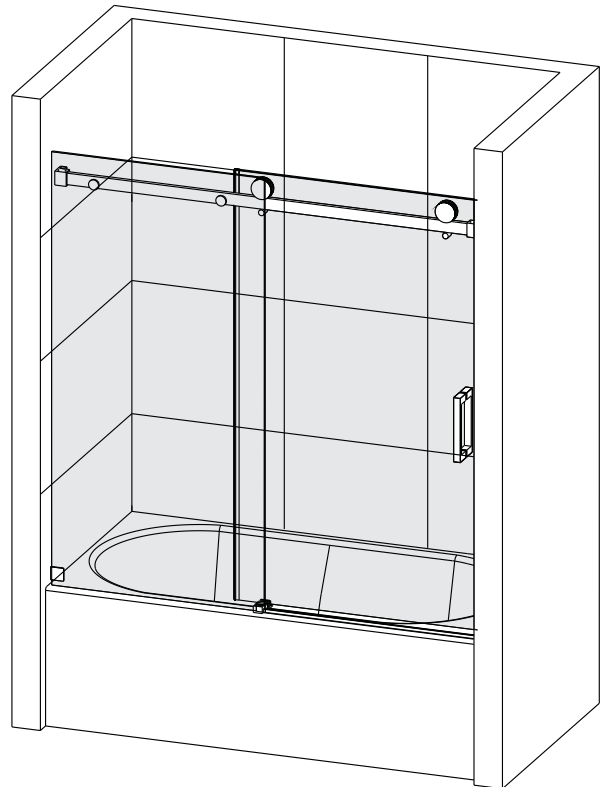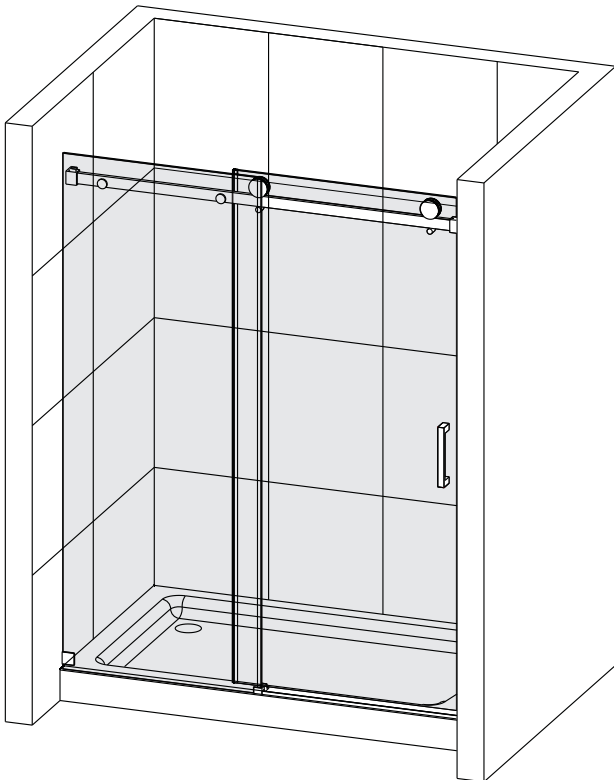







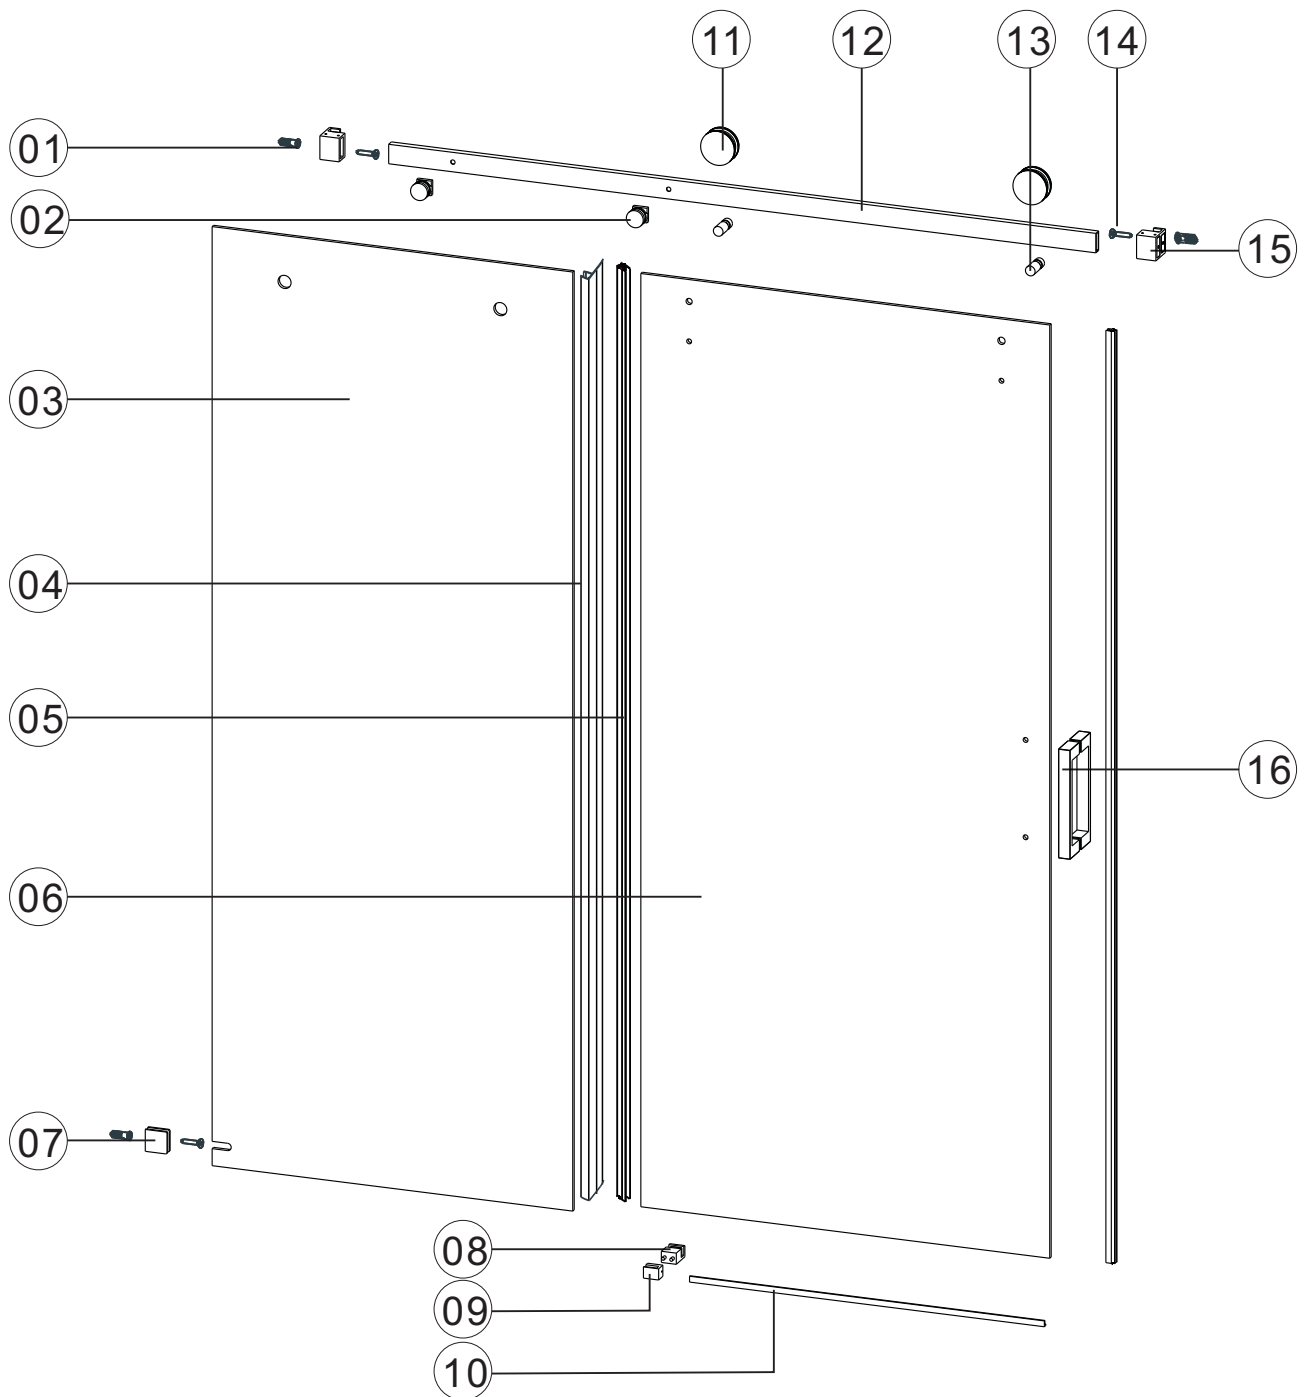



* Use a 6mm(1/4") drill bit for ceramic when drilling into ceramic tiles

CHOOSE A CONFIGURATION






PARTS LISTING




ITEM	PARTS	DIAGRAM	QTY	ITEM	PARTS	DIAGRAM	QTY
1	Wall plugs Ø6		3	9	Floor guide for door glass		1
2	Track holder for fixed panel		2	10	Anti-splash threshold		1
3	Fixed panel		1	11	Roller		2
4	Fixed panel seal		1	12	Rail		1
5	Door seal		2	13	Anti jumping knob		2
6	Sliding door		1	14	Screw St4x20		3
7	Wall mount bracket		1	15	Guide rail bracket		2
8	Floor guide for fixed glass		1	16	Back to back door pull		1



1

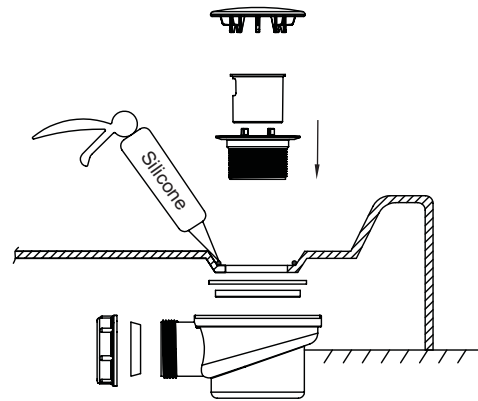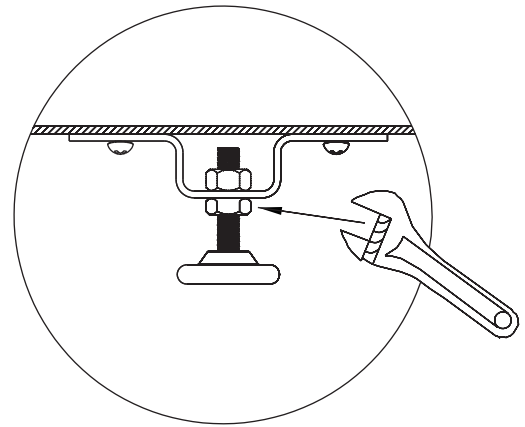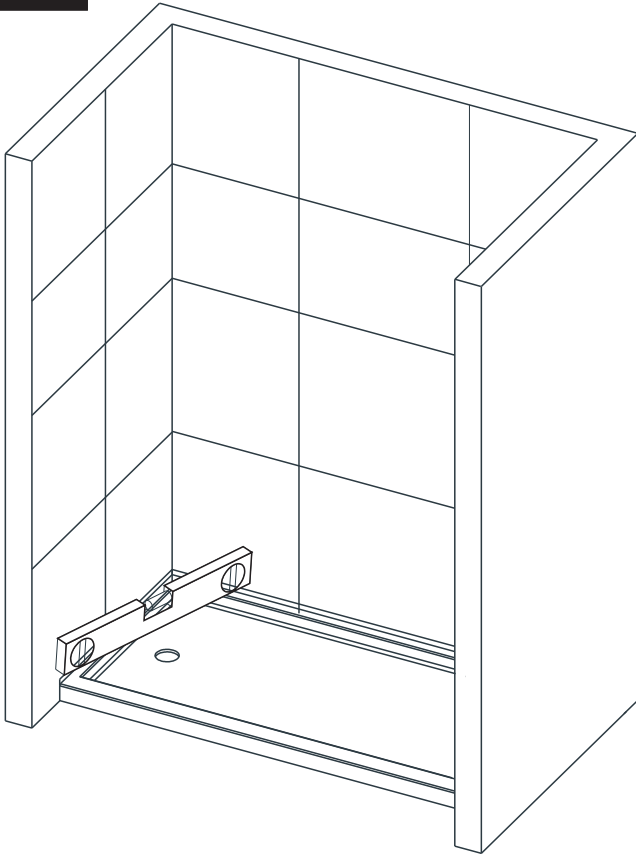



2

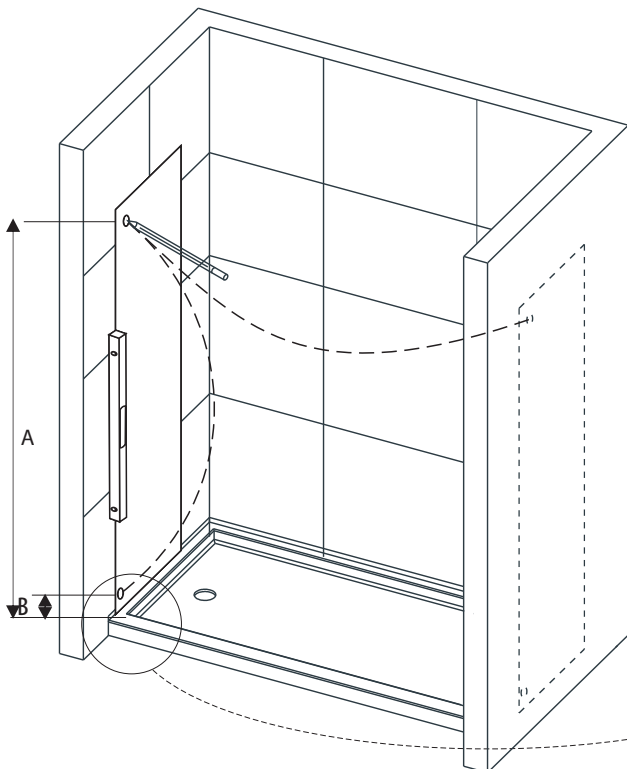






Product Height	A	B	C
60" (1524mm)	56 1/4" (1429mm)	5 7/8" (150mm)	7/8" (23mm)
66" (1676mm)	62 1/4" (1581mm)		
72" (1828mm)	68 1/4" (1733mm)		
75" (1905mm)	71 1/4" (1810mm)		
76" (1930mm)	72 1/4" (1835mm)		
78" (1981mm)	74 1/4" (1886mm)		
79" (2006mm)	75 1/4" (1911mm)		

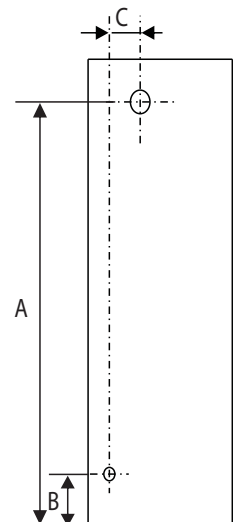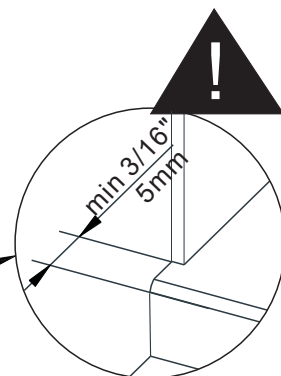




3

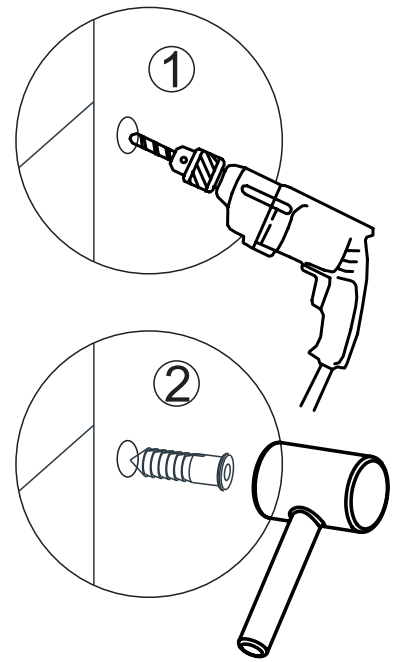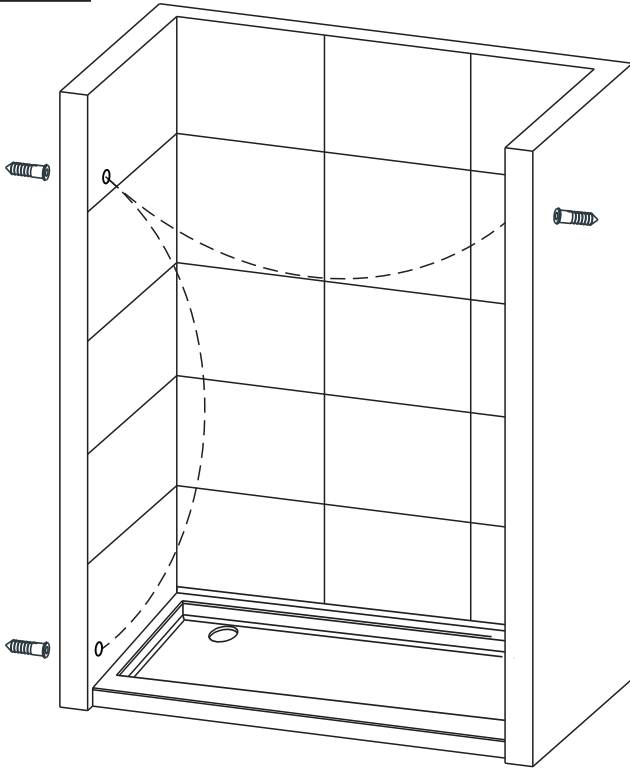






4

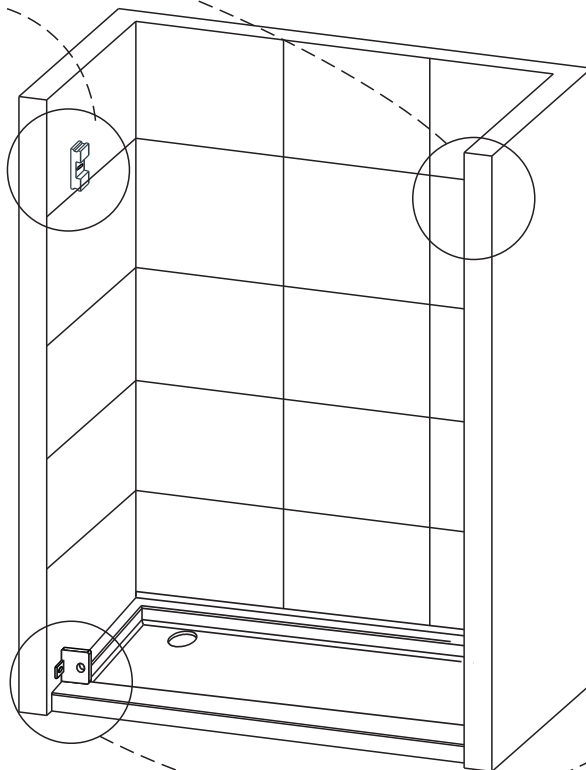




5

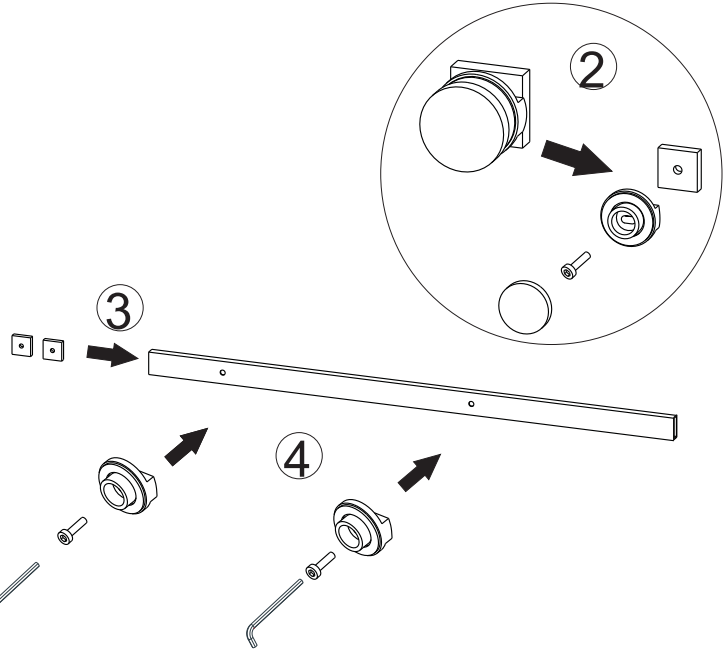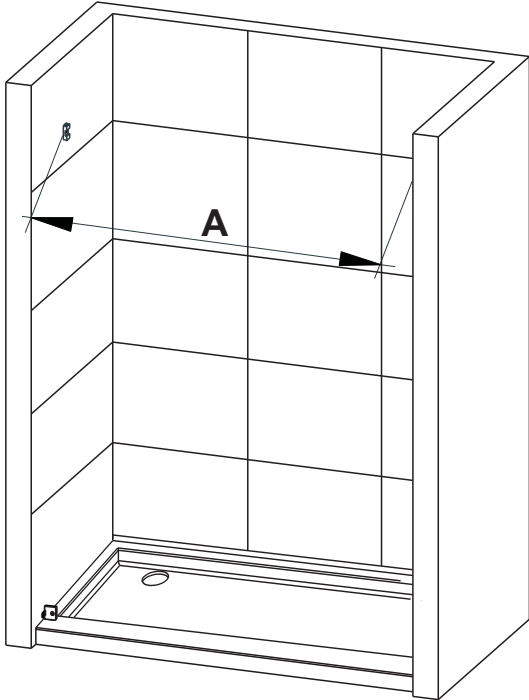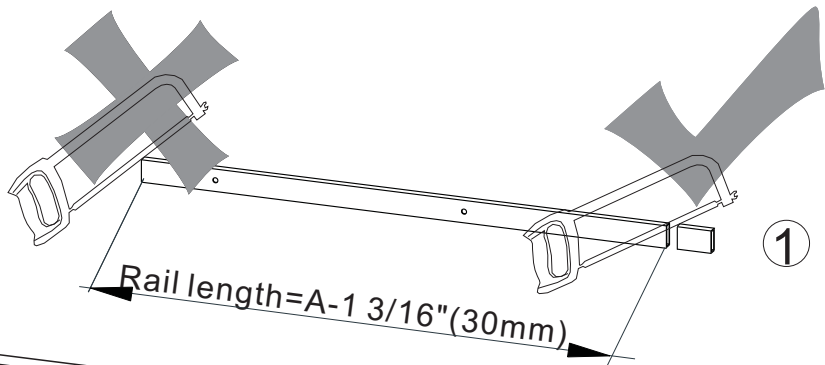







6

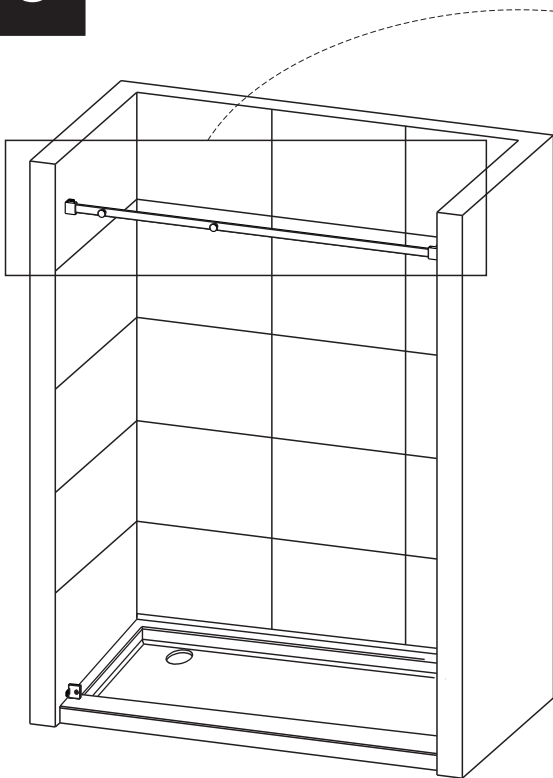




7

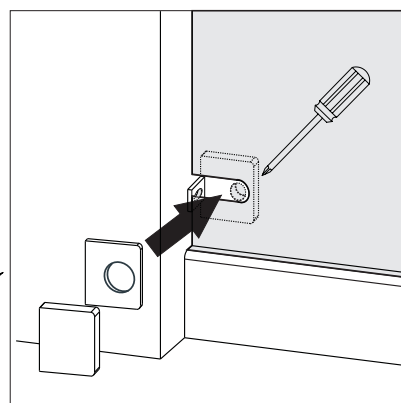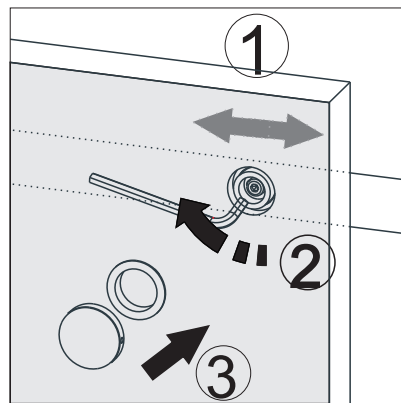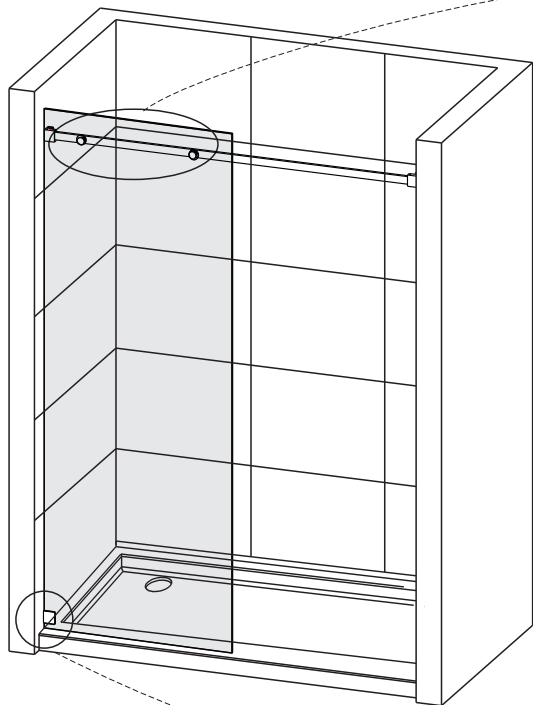




8

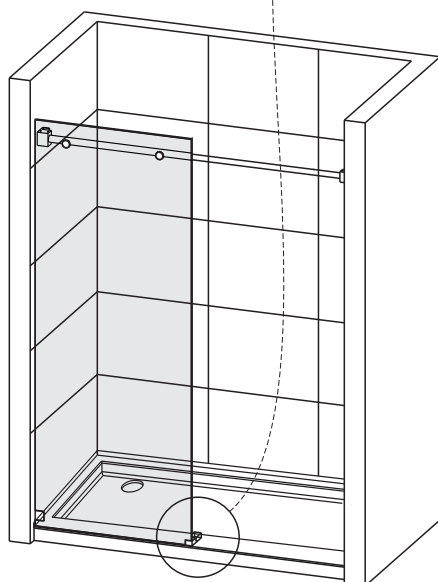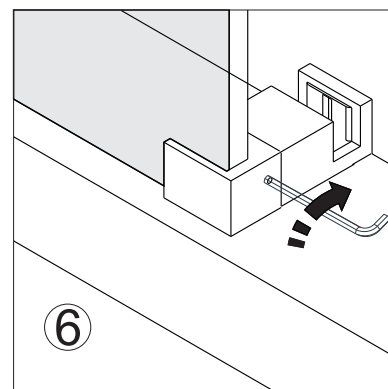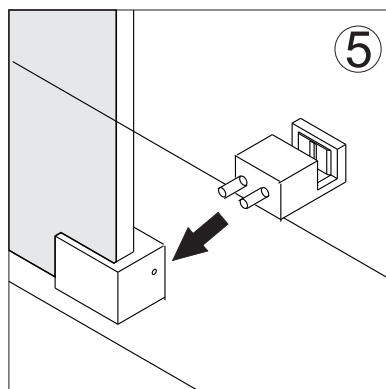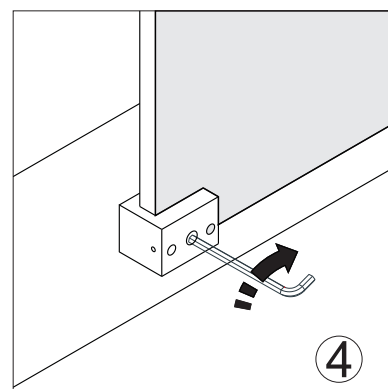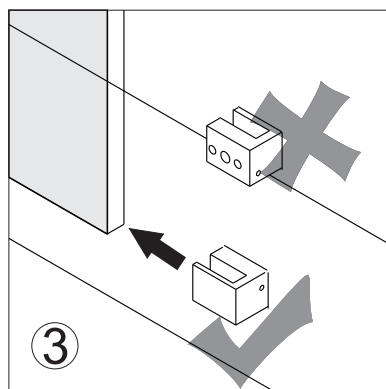





9

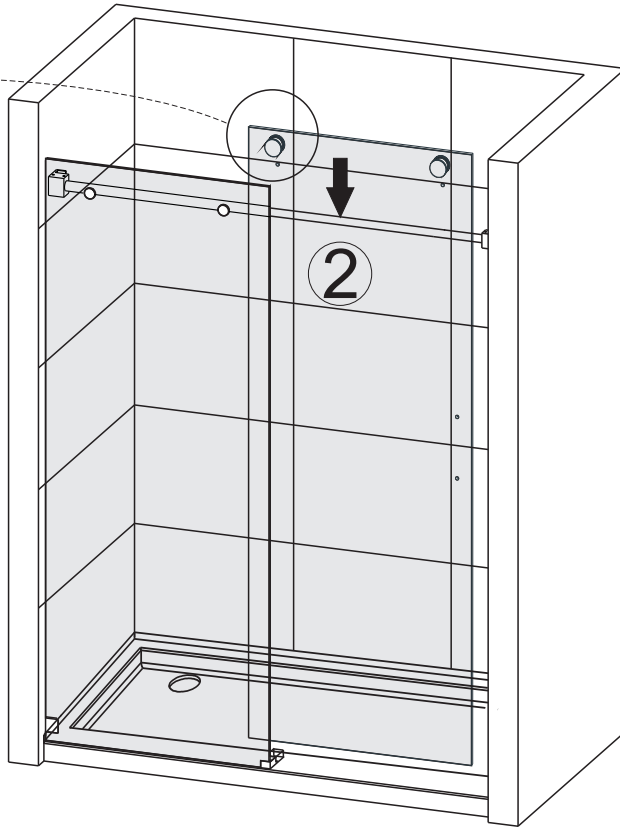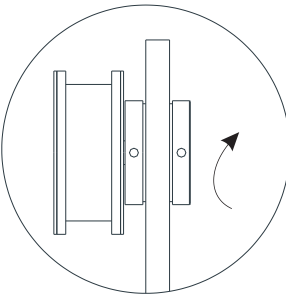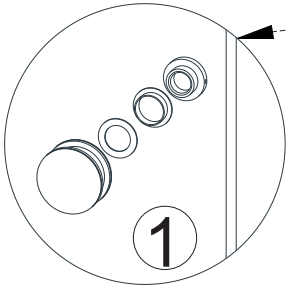






10

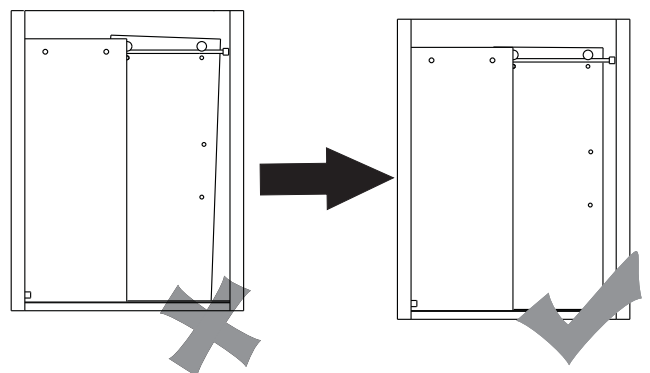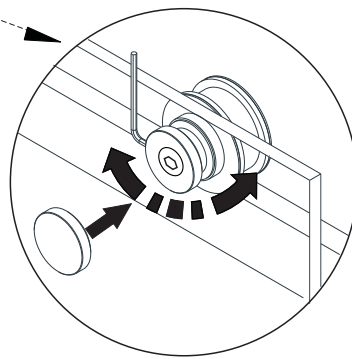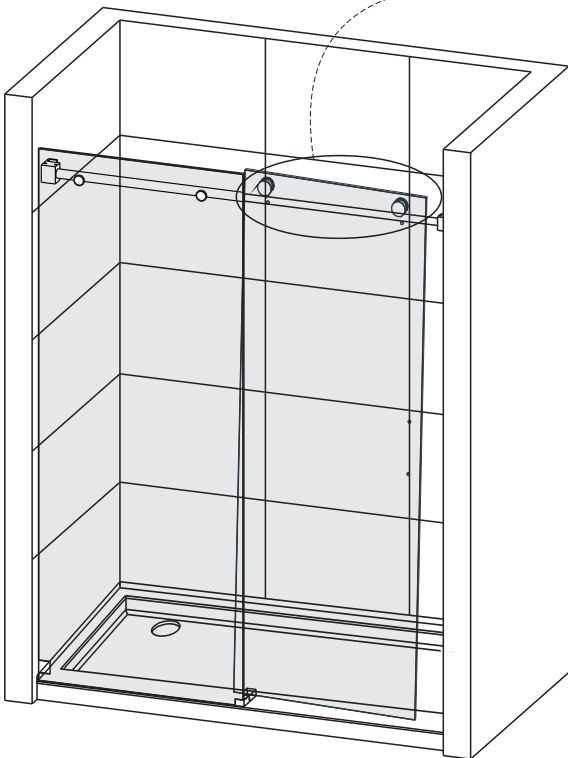





11

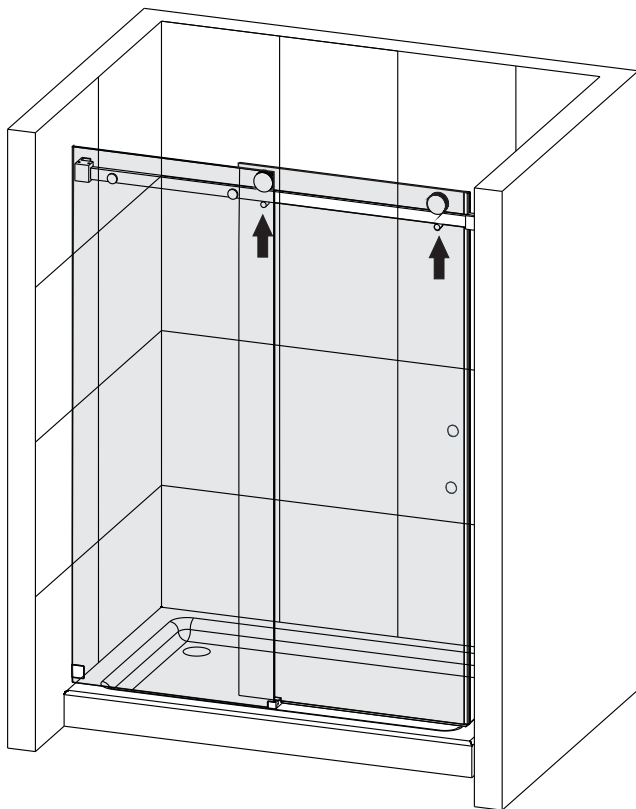



12

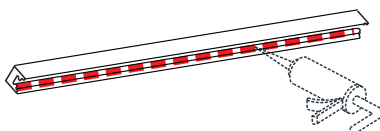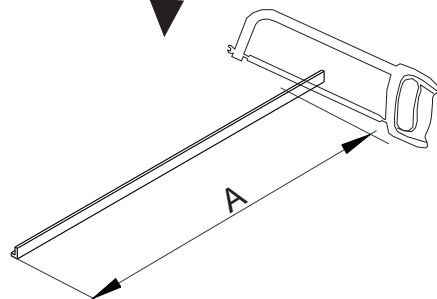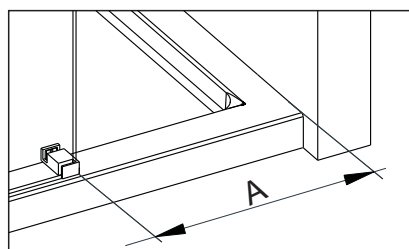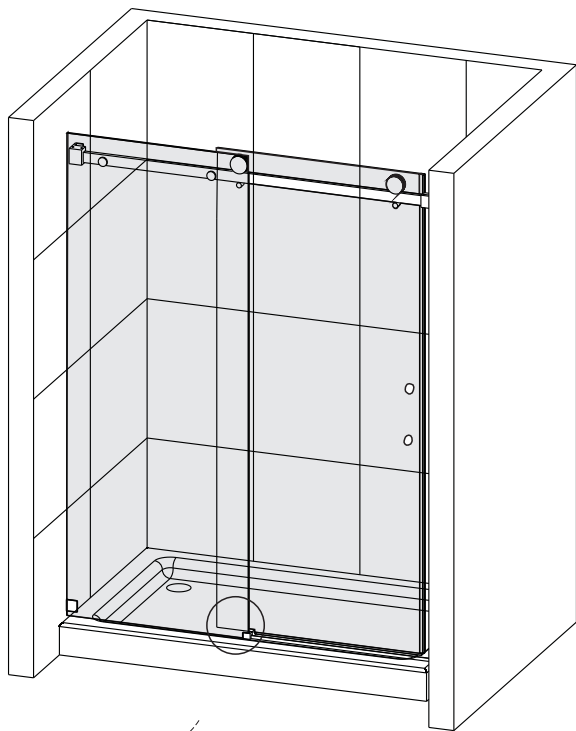

13

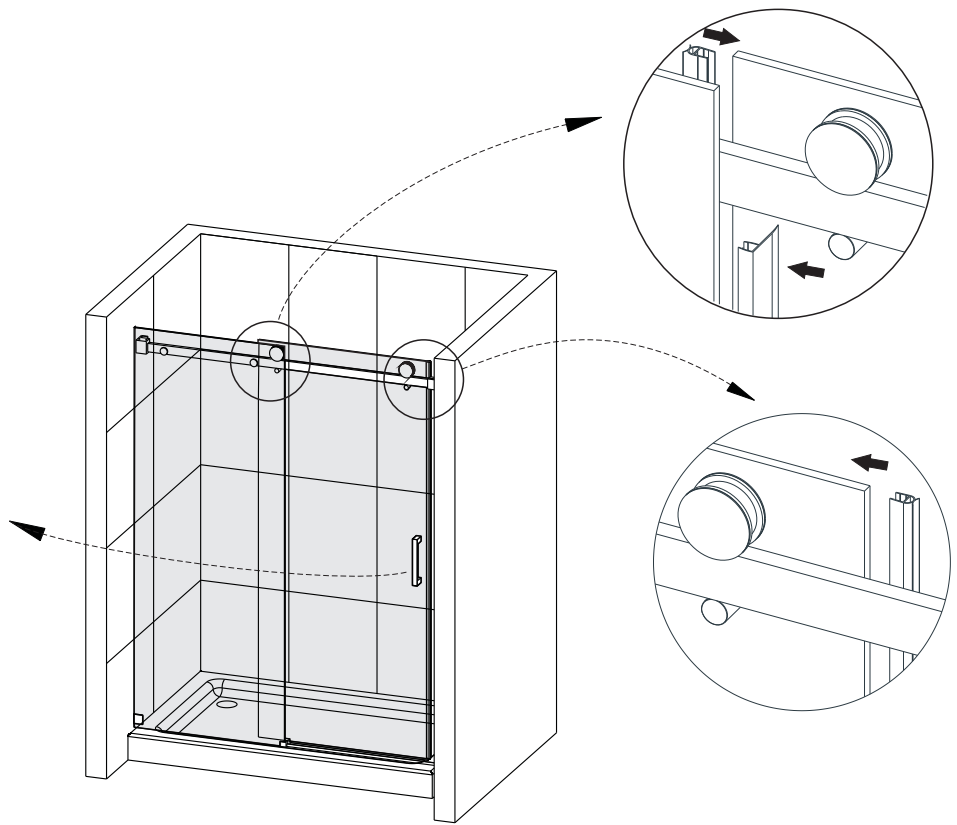

14

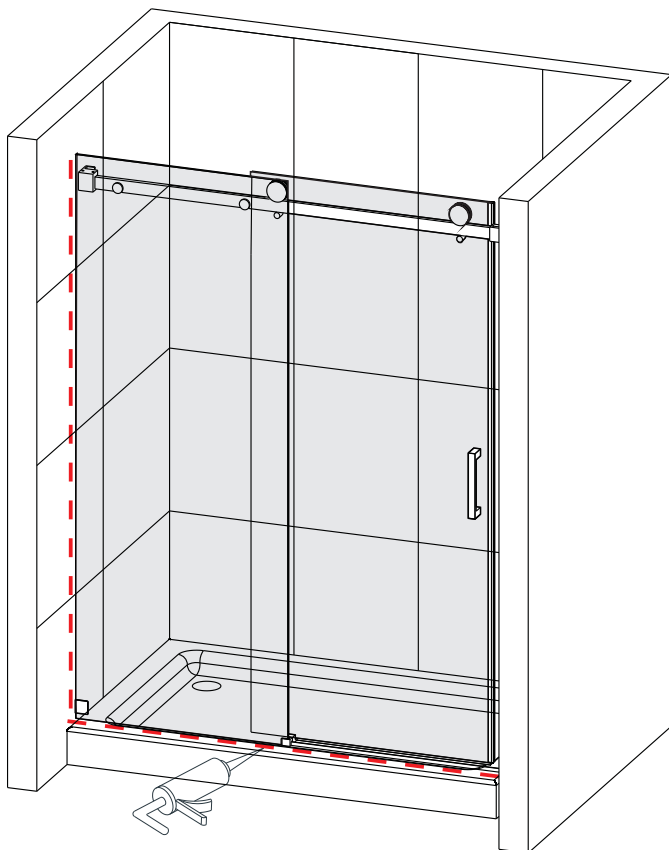

24 HOURS